

DETAIL B

1.5m (3m relaxation)

Traffic cones (45° tapers have 1.2m spacing, no relaxations)

N.B. During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with table A1.3 (Appendix 1)

On motorways and all purpose dual carriageways with hard shoulders on which national speed limit applies, 1m cones will be required for both standard works and works for which relaxations may be applied, for both lead in tapers and the facing wall on a lane change.

DETAIL C1

9m

750mm or 1m high traffic cones

N.B. During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with table A1.3 (Appendix 1)



For relaxation to Detail C1 see table A1.3 (Appendix 1)

DETAIL C2

3m

750mm or 1m high traffic cones

N.B. During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with table A1.3 (Appendix 1)

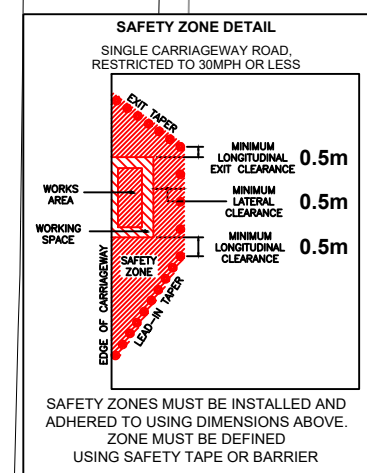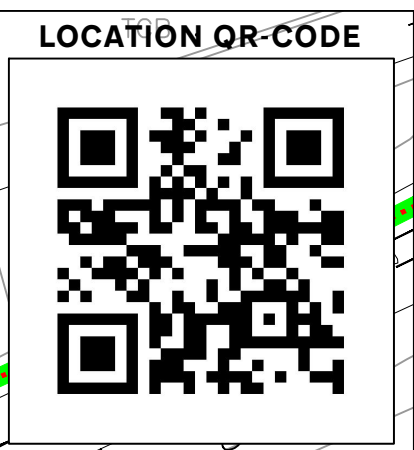

Measure the distance between 'WAIT HERE' signs to datum point

| | | | | | | | |
|------------------------|----|----|-----|-----|-----|-----|-----|
| Distance (metres) | 0 | 50 | 100 | 150 | 200 | 250 | 300 |
| All-Red time (seconds) | 5 | 10 | 15 | 20 | 25 | 30 | |
| Distance (metres) | 30 | 75 | 135 | 195 | 255 | 300 | |
| Green time (seconds) | 35 | 40 | 45 | 50 | | | |

| Phase | S.Head | T.Flow | Max Green | All Red | Location |
|-------|--------|--------|-----------|---------|---------------------------|
| 1 | A | | 35 | 15 | Portsmouth Road Eastbound |
| 2 | B | | 35 | 15 | Portsmouth Road Westbound |
| 3 | C | | 35 | 10 | Wessex Gate |
| 4 | D | | 35 | 10 | Five Heads Road |

| | |
|---|--|
| Qty: 4 Ref: 517 Road narrows on one side only ahead - left | |
| Qty: 4 Ref: 518 Single file traffic | |
| Qty: 4 Ref: 543 Traffic signals ahead | |
| Qty: 8 Ref: 610 Keep right | |
| Qty: 5 Ref: 610 Keep left | |
| Qty: 4 Ref: 645 End panel | |
| Qty: 8 Ref: 7001 Road works ahead | |
| Qty: 4 Ref: 7011.1 4 Way Control - Wait here until green light shows | |